


Duplex filters are used in hydraulic systems for separating solid materials from the hydraulic fluids and lubricating oils. They are intended for installation into piping. The filter element can be changed without any operational interruption.

Your product advantages: 16 FD

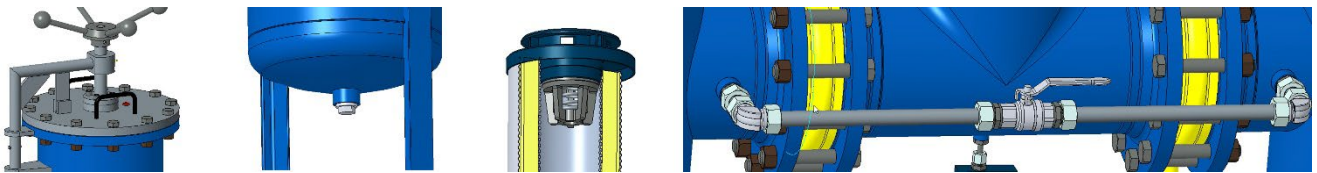

- Ceiling lift-off device (from NG4000)
- Bleed valve
- Optical maintenance indicator
- Drain plug
- Bypass valve at highest position of filter cover (no gas / air accumulation)
- Pressure compensation as standard